

171,4 (6 3/4) AIRJ522



AirJet bit with open bearing. Design of the bit, air flushings and bit bearing ensures reliable cooling of bit bearing during drilling operation. AirJet bits provides high performance result, low cost per meter due to high ROP and bearing reliability. Applied for drilling in soft abrasive formations.

SPECIFICATION

Diameter, mm (in)	171,4 (6 3/4)
IADC	522Y
Seal	none
Total number of inserts/teeth (inner/outer)	107 (64/43)
Total number of rows of inserts/teeth (inner/outer)	11 (8/3)
Number and diameter of nozzles*	3x13
Thread	Pin 3 1/2 Reg
Weight net/gross, kg	19 / 21,3

DRILLING MODES RECOMMENDED**

Make-up torque, kN·m	9,5-12
RPM	120-50
WOB, t (lbs)	4,8-15,1 (11000-33000)

DESIGN FEATURES



Open roller bearing with rollers in large and small roller race. Absence of seal allows to place maximum size of the rollers, which increases the bearing capacity.



Additional heel row of TCI is designed to protect cone body against erosion wear and to increase contact area between the borehole and bit, to improve borehole quality.



To protect leg body and prevent bit wear, shirttail and leading edge are reinforced with TCI and additionally hardfaced.



Side air flushing is applied.




Back pressure valve is made to protect air passages and bearings as well as drill pipe bodies against cuttings during operational or emergency shutdowns.



Hardfacing between TCI rows is designed to protect cone body against erosion wear and to prevent inserts loss in high abrasive formations.

PACKAGE DESIGN

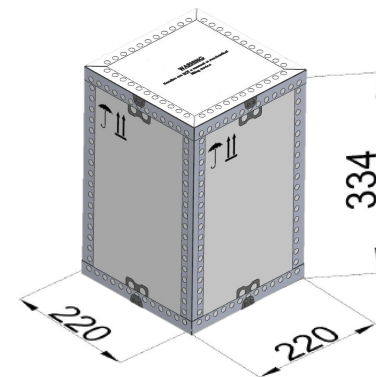

* Standard specification may be changed on customer request.

** The specified ranges of WOB and RPM represent typical drilling modes, adherence to them will not necessarily result in optimal bit life or minimum drilling costs. It is not recommended to apply both WOB and RPM upper limits at once. For the purpose of performance improvement, minor changes of the bit design may be introduced without prior customer notification.